


FP-20

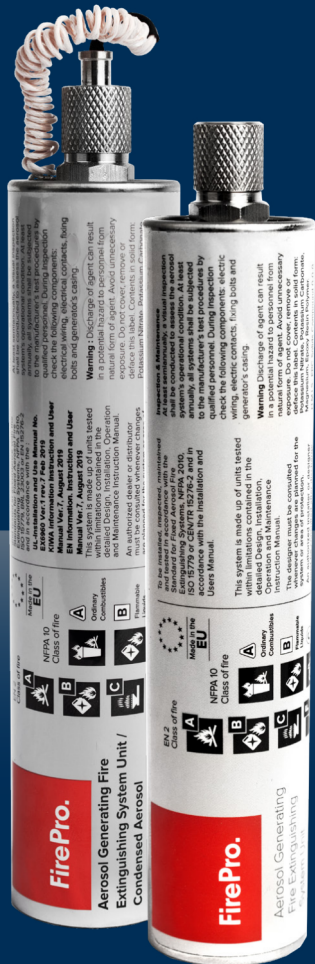

■ FP-20T

Product Code: 10620

Product Description: FirePro Fire Extinguishing Generator FP-20T

Features:

- UL, KIWA & BSI Certified
- Single outlet (at the bottom)

■ FP-20TH

Product Code: 10649

Product Description: FirePro Fire Extinguishing Generator FP-20TH

Features:

- KIWA & BSI Certified
- This model can be activated by a Bulb Thermal Actuator only
- Single outlet (at the bottom)

TECHNICAL INFORMATION

Model	FP-20T / FP-20TH*
Activation method	Electrical (Minimum pulse voltage: 1.5 VDC, Minimum pulse current: 0.8 A, Minimum pulse duration: 0.5 s) *FP-20TH Thermal Activation Only
Activator Type	Heating Element with 2.2 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	310g (excluding bracket)
Mass of FPC compound	20 g
Operational discharge time	5 - 10 seconds
Dimensions (Diameter : Height)	32 mm : 170 mm (incl. connector housing)
Fire Class	EN 2: A,B,C,F / NFPA 10: A,B,C

Generators are provided complete with brackets